


Digital message boards are vital for communicating safety messages, announcements, time/date and upcoming events throughout your school/campus, manufacturing plant, healthcare facility, or corporate building. The bright, tri-colour single line or dual line LED's help you get your message across quickly and effectively.



Single Line Display
Part #610001-POE

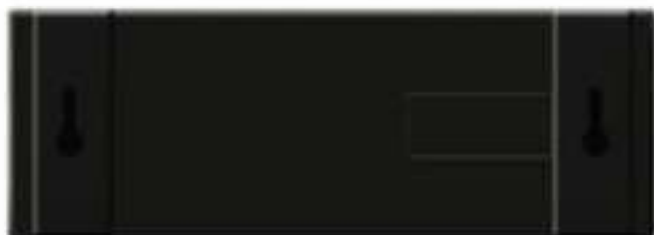


Features:

- Single or Dual Line Display
- Customised Pre-Recorded Messages
- Individual or Group Messages
- Time/Date Display
- Tri-Colour LED (Red, Green, Orange)
- Adjustable Brightness
- Variable Scrolling Speed
- Unlimited Characters
- Highly Visible LED Display
- Automatically Adjusts for DST
- No Recurring Fees
- Maintenance Free

Requires Universal Server Module (USM)



Dual Line Display
Part # 610002-POE

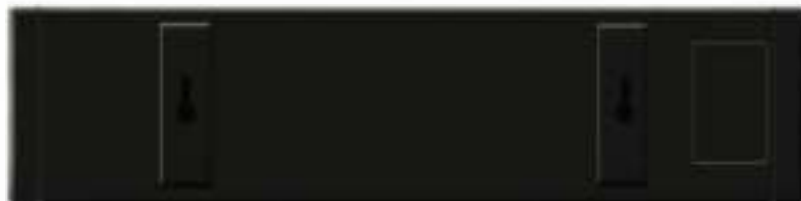

IP-PoE Message Board Specifications

Weight:

Single Line - 1.3 lbs (0.59kg)
 Dual Line - 4.2 lbs (1.91kg)

Message Board Sizes

Single Line - **4.5" H X 12.8" W X 1.7" D** (11.43cm x 32.51 cm x 4.32cm)
 Dual Line - **6.3" H X 25.6" W X 1.57" D** (16cm x 65cm x 3.99cm)

Power Supply:

PoE (IEEE 802.3af) or AC Power (Dual Line Message Board Only)

Operating Range:

(Temperature): 32° F-120° F (0° C - 48.89° C)

Material (Frame and Lens Construction):

ABS Plastic Case/Acrylic Lens

Viewing Distance

100 Feet (3,048cm)


Data Form

Single Line - 7 character spaces - unlimited scrolling
 Dual Line - 14 character spaces - unlimited scrolling

LED Size and Color:

Single Line - 2.75" H (6.98cm H) Tri-Color LEDs (Red/Green/Orange)
 Dual Line - 4.75" H (12.06cm H) Tri-Color LEDs (Red/Green/Orange)

Single Line Display
 Part # 610001-POE

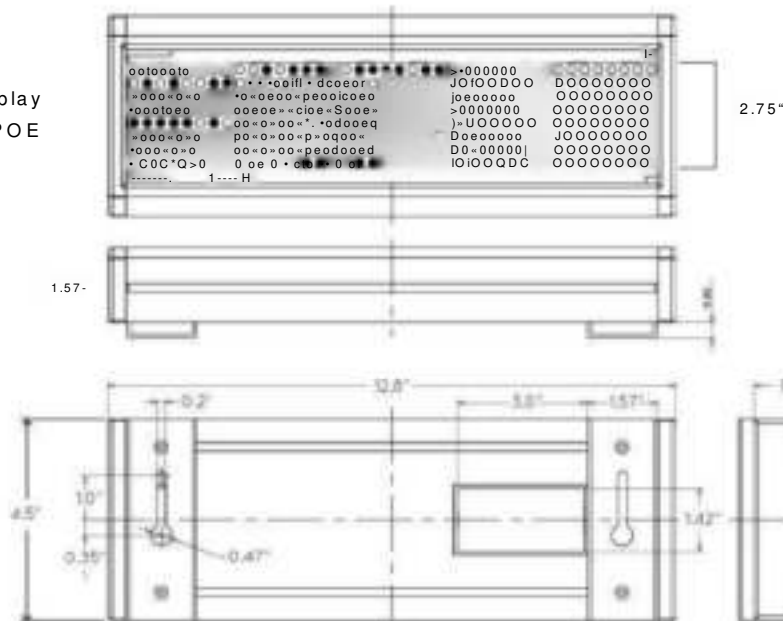

Dual Line Display
 Part # 610002-POE

