

## FLUSH MOUNTED CLOCKS



Valid from 07.07.2021.


## ZAM5-L i ZBM5-L POE+ Flush mounted

The flush mounted clocks are available with 50 mm high digits, 4-digit (HH:MM) and 6-digit (HH:MM:SS) versions. Designed to meet operating theatres standards - stainless steel casing and glass face. The clocks can be additionally equipped with a flush-mounted stainless steel remote control necessary to operate the stopwatch function. They also offer the option of an alternating time and date display. The clocks are managed via the web panel or via dedicated RGB Clock Set software.



### DIMENSIONS


#### ZAM5-L POE+ Flush mounted

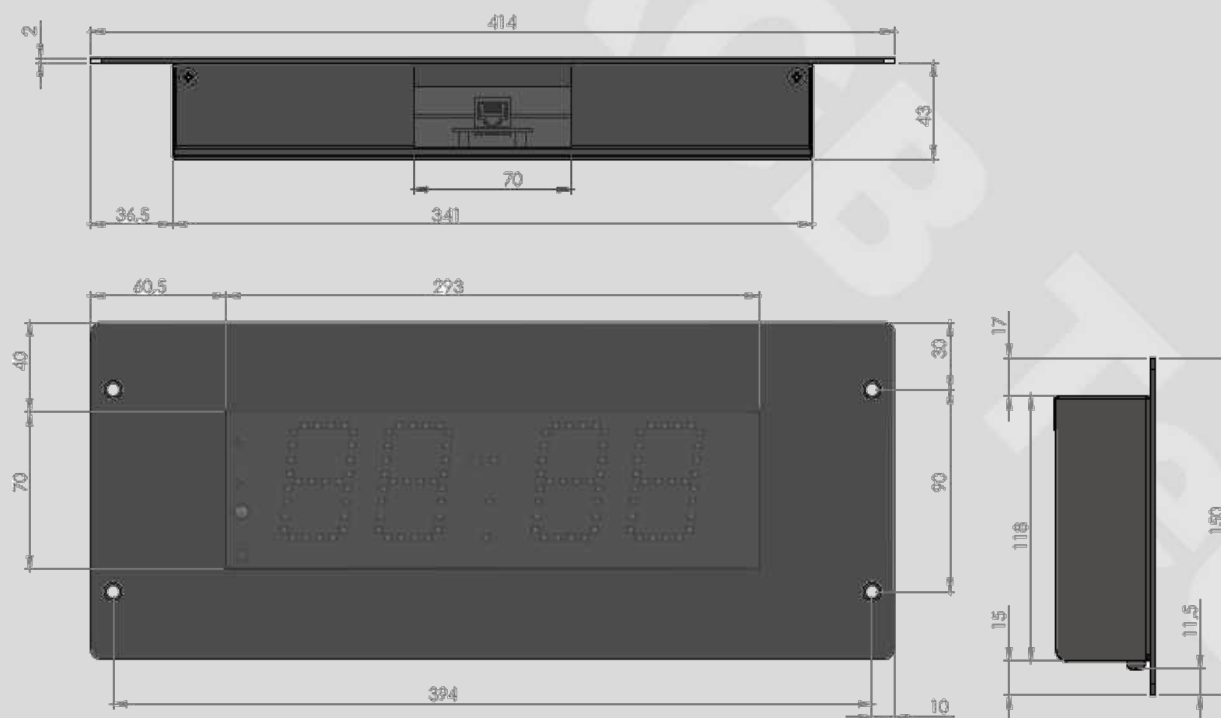

## ZBM5-L POE+ Flush mounted



## Wired Remote

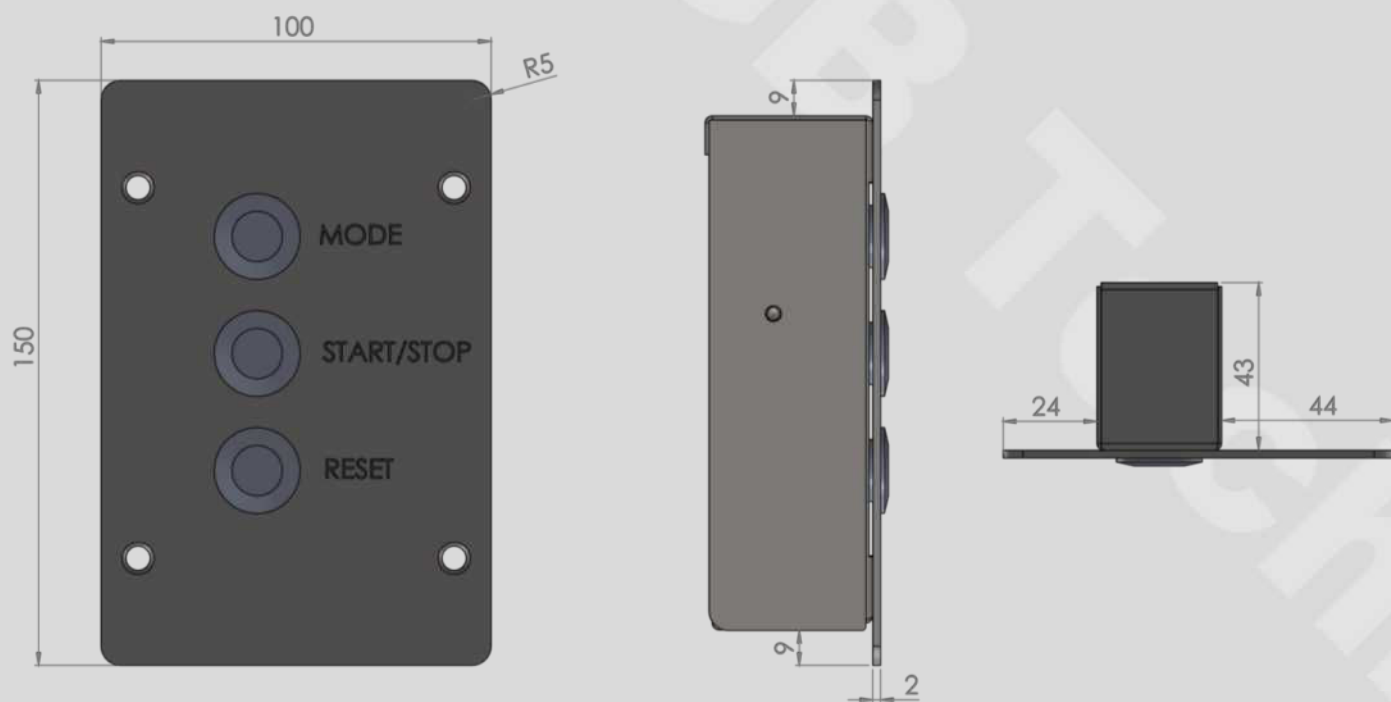

## Specification

	ZAM5-L POE+ Flush Mounted	ZBM5-L POE+ Flush Mounted
Display format:	HH:MM	HH:MM:SS
Digit height:	50 mm	
Power supply:	Power over Ethernet IEEE 802.3at Mode A	
Device operation temperature (ambient):	-25°C ÷ 45°C	
Device operation temperature (device surface):	-25°C ÷ 60°C	
Casing tightness rating IP:	66	
Average power consumption of the device:	10W	14W

- ✓ Super bright wide-angle selected LEDs
- ✓ Legibility even in direct sunlight (automatic brightness control)
- ✓ Module construction, easy installation and maintenance
- ✓ Additional functions: stopwatch,
- ✓ Clocks are operational via LAN interface, optionally with wired remote
- ✓ Possible synchronization with NTP server
- ✓ Optional accessories: GPS receiver, temperature probe,
- ✓ As standard clocks are wall flush mounted
- ✓ Stainless steel case with glass face (can be cleaned with industrial cleaning supplies)

MODEL	Control	Digit Height	LED Colour	
ZAM5-L POE+	LAN/Web PANEL	50 mm	RED	
ZBM5-L POE+	LAN/Web PANEL	50 mm	RED	
Wired Remote	-	-	-	

Innovation Wireless Ltd  
 Maiden House, Long Bennington Business Park, Long Bennington, Newark,  
 Nottinghamshire NG23 5DJ

Phone: 08000 248 091  
 Email: [info@innovation-wireless.co.uk](mailto:info@innovation-wireless.co.uk)  
 Web: <https://www.innovation-wireless.co.uk>